

STORAGE TANKS

410 BBL DOUBLE WALL STORAGE TANKS

FEATURES & BENEFITS

V.E. Enterprises Double Wall storage tank is the latest in our line of storage vessels, specifically targeting environmentally sensitive areas. Standard features include a front stairway, rear stairway leading to a top platform with foldable handrails, 4" drains front and rear, 3" rear fill line, fully corrugated exterior walls, smooth interior walls and a "V" bottom floor for ease of cleaning and drainage.

TANK SPECIFICATIONS

- 410 BBL capacity
- Length: 47' 0"
- Width: 8' 6"
- Primary Sides: 3/16" SA-36 steel
- Secondary Sides: 3/16" SA-36 steel
- Top: 1/4" SA-36 steel
- Primary Floor: 3/16" SA-36 steel
- Secondary Floor: 1/4" SA-36 steel
- Hutch, 7700 or equivalent
- Axle: Round, 22,500 lbs. with automatic slack adjusters
- Wheels: BUDD type, unimount
- Tires: 11 x 22.5 bias ply
- Brakes: D.O.T. approved, with air brake system
- Fill: 3" curb side over top (rear)
- Front Drain: 4" flanged butterfly valve at "V"
- Rear Drains: 4" flanged with butterfly valve
- Vent: 3" mushrooms, one (1) interstitial, one (1) primary tank
- Front Stair: Steel grip strut to platform
- Rear Stair: Steel grip strut to platform at top; fold-down handrails around platform
- One color DuPont Imron DTM paint

OPTIONS

- Carboline two-part epoxy coating
- Leak and level detection fittings
- Other valves, fittings or modifications to customer specifications



Interior View




ENTERPRISES, INC.






P.O. Box 369, Springer, OK 73458 • 800.234.2329 – 580.653.2171

www.venterprises.com

Dimensions

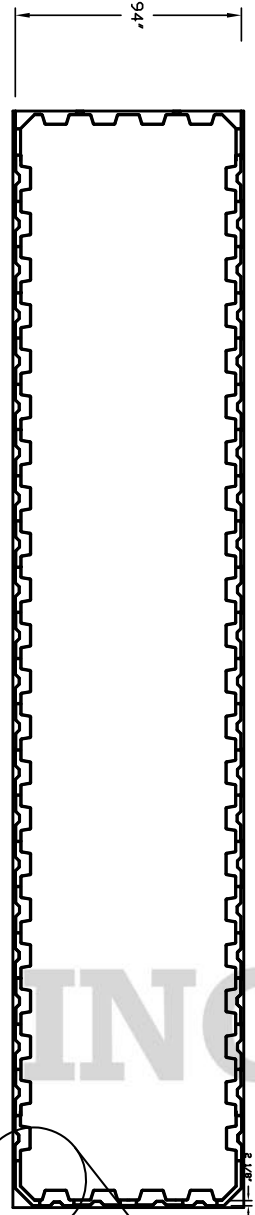

BIRDSEYE VIEW OF DOUBLE WALL CONSTRUCTION

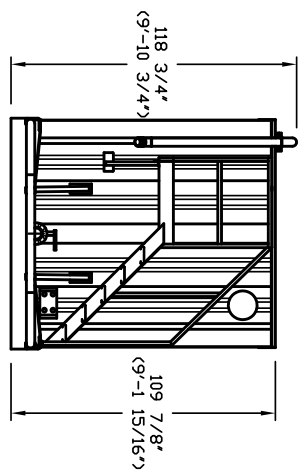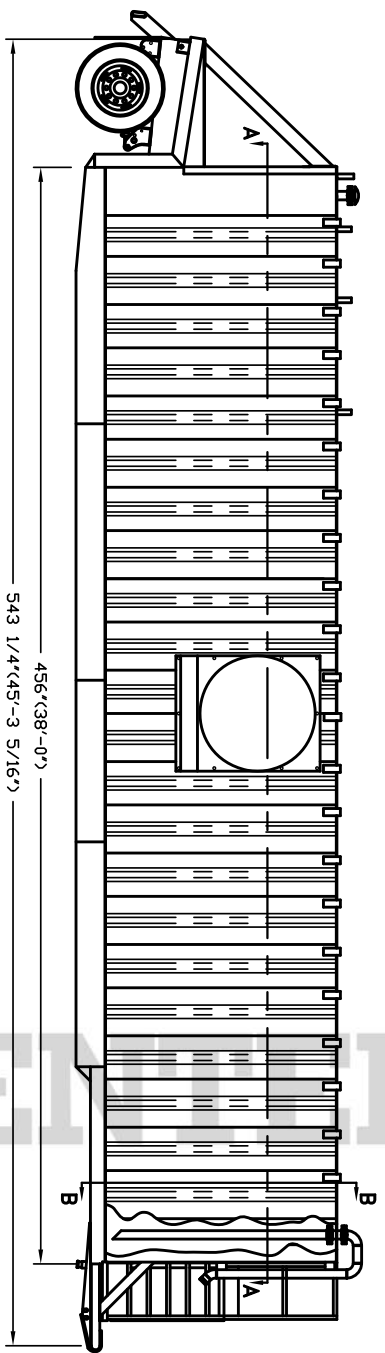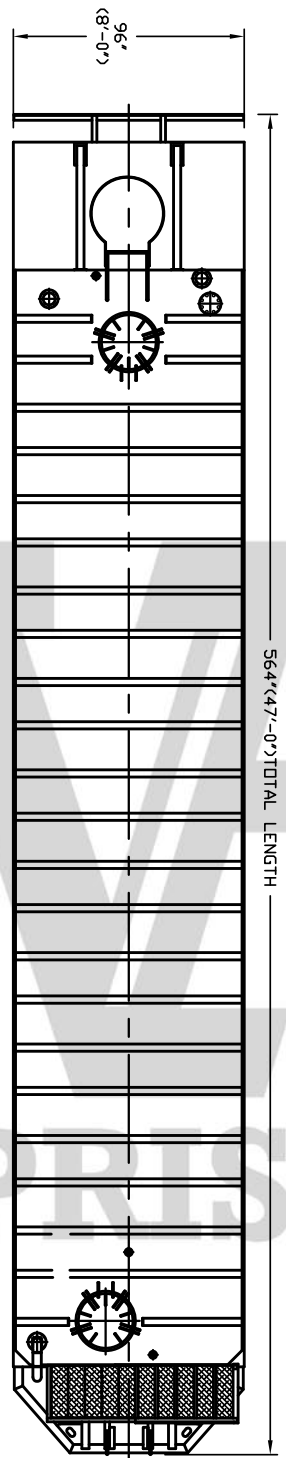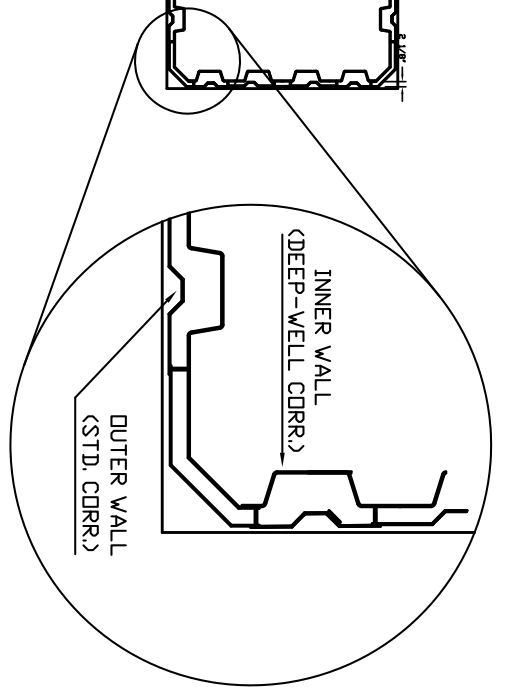

ENTERPRISES, INC.