

STORAGE TANKS

500 BBL FLAT TOP STORAGE TANKS

FEATURES & BENEFITS

V.E. Enterprises Flat Top storage or “frac” tank is known as the industry benchmark for storage vessels. Standard features include a front stairway leading to a top platform, 4” drains front and rear, fully corrugated ‘rod-less’ walls, a “V” bottom floor for easy drainage. This versatile tank comes in six other configurations (see options below).

TANK SPECIFICATIONS

- 500 BBL capacity
- Length: 46’ 9”
- Width: 8’ 6”
- Sides: 1/4” SA-36 steel
- Top: 1/4” SA-36 steel
- Floor: 1/4” SA-36 steel
- Hutch, 7700 or equivalent
- Axle: Round, 22,500 lbs. with automatic slack adjusters
- Wheels: BUDD type, unimount
- Tires: 11 x 22.5 bias ply
- Brakes: D.O.T. approved, with air brake system
- Front / Side Manways: 22” V.E. dome lids
- Front Fittings: 4” flanged nozzle
- Fill: 3” at rear
- Front Connection: 4” flanged nozzle; 4” flanged butterfly valve
- Rear Fitting, Drains: 4” flanged with butterfly valve
- Stair: steel grip strut to platform
- One color DuPont Imron DTM paint

OPTIONS



- Gas-buster, weir, open-top, short-wall or flowback styles available
- Carboline two-part epoxy coating
- Inside or outside manifolds with butterfly valves
- Additional manways
- Gel or steam lines
- Sign plates
- Other valves, fittings or modifications to customer specifications



ENTERPRISES, INC.

P.O. Box 369, Springer, OK 73458 • 800.234.2329 – 580.653.2171

www.venterprises.com

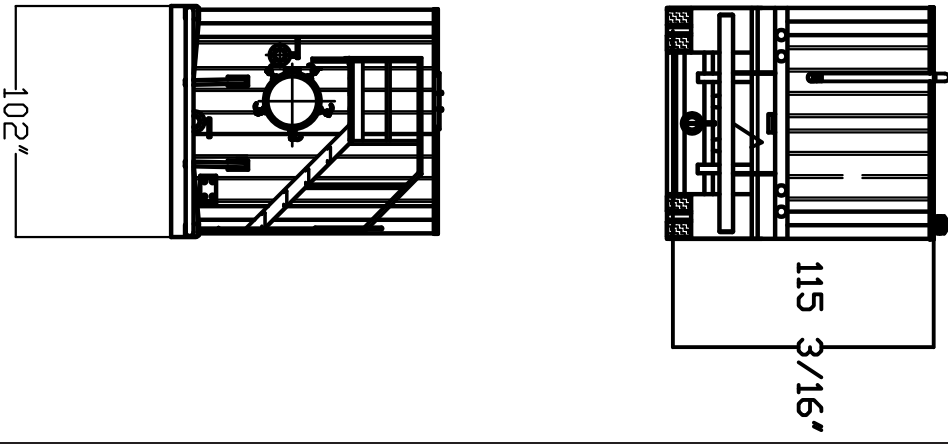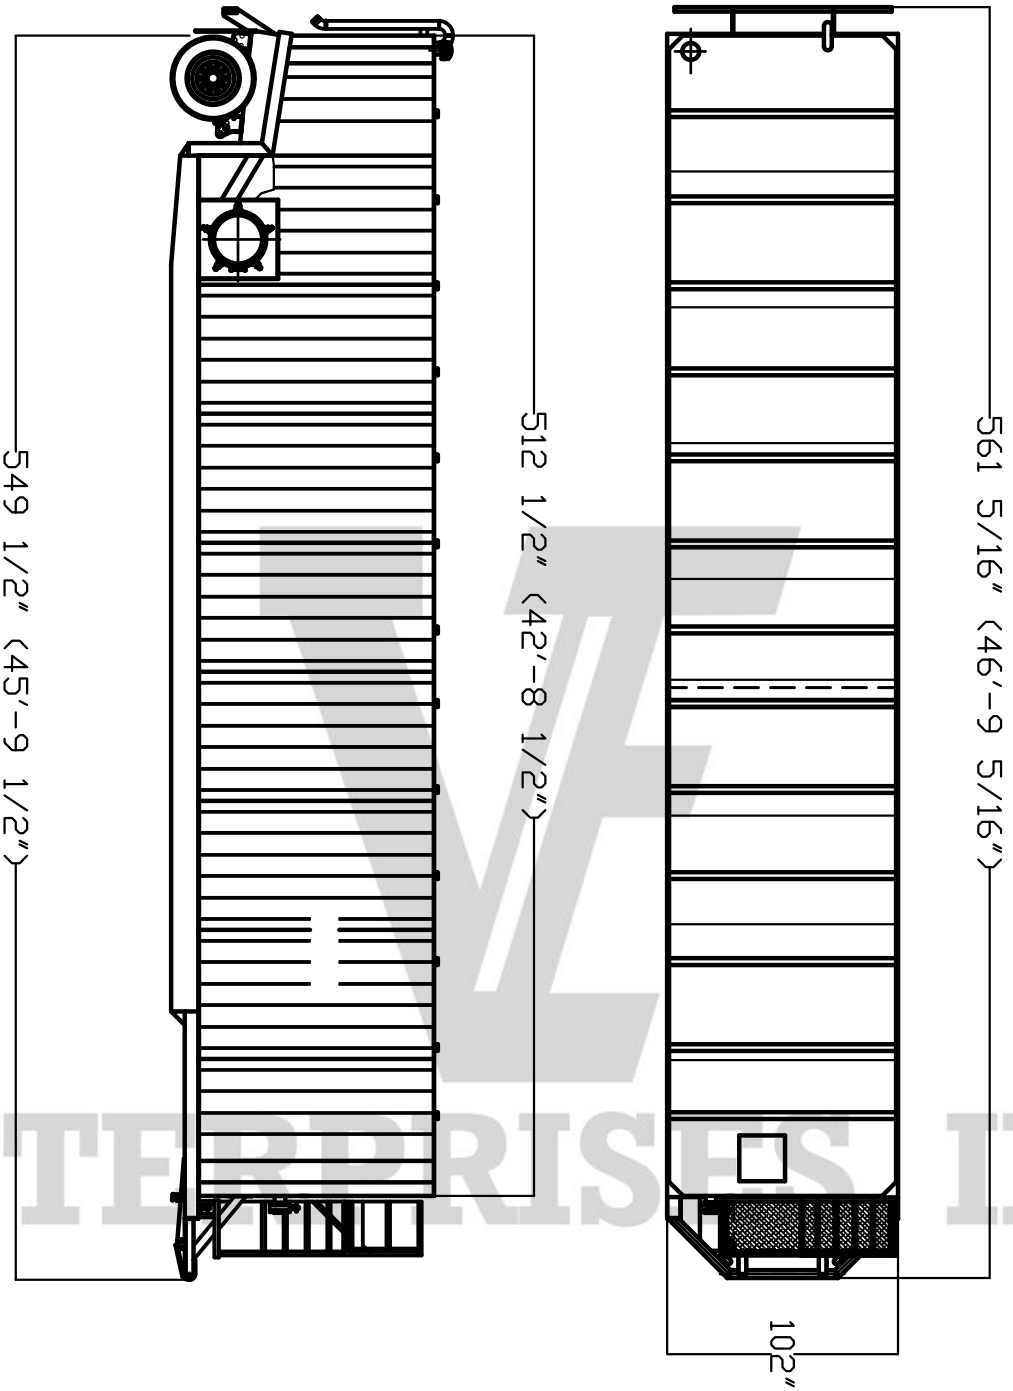

Dimensions

ENTERPRISES INC.